


**TECHNICAL DATA SHEET n°LIGHT36 - Sep. 2020 (Rev.0) Product: Lightpiù-ScreenLight 0,8 mm**

**PRODUCT:**

**SCREEN LIGHTPIU 0,8 mm**

**CROSS SECTION:**

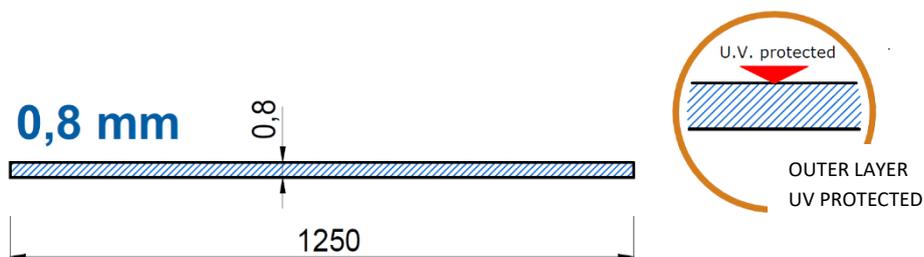


**SPECIFICATIONS:**

**FLAT SHEET IN SOLID POLYCARBONATE, ~ max. WIDTH, 1250mm, 0.8mm THICK.** FOR USE AS AN OVERLAYING / PROTECTING SCREEN FOR MULTI WALL FLAT SHEETS  
SHEETS ARE SUPPLIED TO THE EXACT LENGTH REQUESTED; FIRE RATING: EUROCLASS B s1 d0.

- **USE:** OVERLAYING OF FLAT AND CURVED ROOFING SKYLIGHTS.
- 
- **NOTES:**

**APPLICATION:**

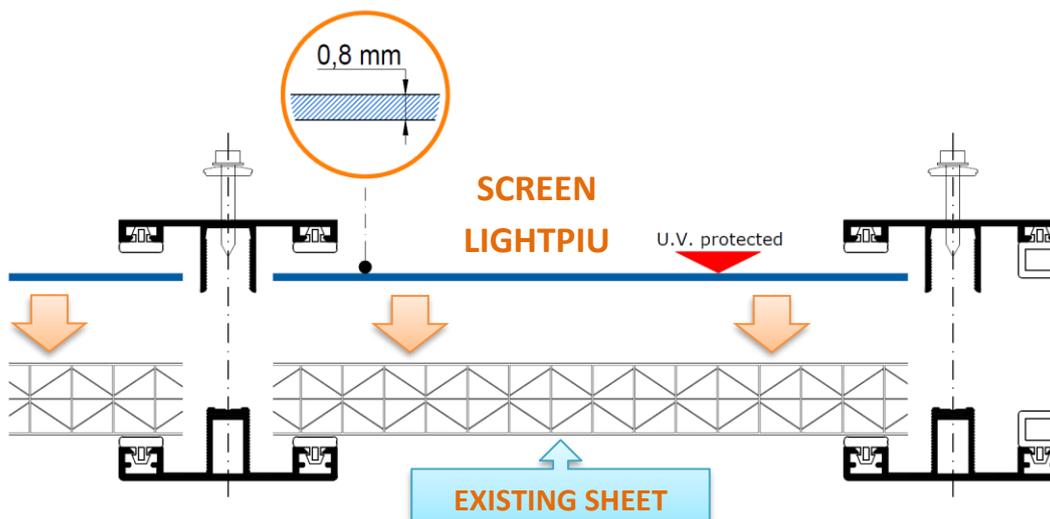

**FLAT AND CURVED APPLICATION FOR OVERLAYING OF EXISTING SKYLIGHTS**

**TECHNICAL DATA SHEET n°LIGHT36 - Sep. 2020 (Rev.0) Product: Lightpiù-ScreenLight 0,8 mm**

**CARATTERISTICHE TECNICHE:**

DATI	Units	Screen LIGHTPIU' 0,8 mm
Thickness	mm	0,8 ±5
Useful width	mm	UPON REQUEST
Sheet width	mm	To size from 800 to 1250 ±5 MAX
Sheet length	m	To length
Colour	-	Clear – Opal – Solar Ice
Structure	-	Solid sheet
U.V. protection	-	UV protected on outer layer
Fire reaction	-	B s1 d0
Temperature working range	°C	-40° / + 130°
Linear thermal expansion	mm/mm°C	6,7 x10 <sup>-5</sup>
Resistance against chemicals – use & maintenance	-	See our literature for specifications
Thermal insulation	W/m°C	5,70
Light transmission		
	CLEAR	%
	OPAL	%
	SOLAR ICE	%
		89±2
		71±2
		44±2
Garanzia	10 years – See our Warranty for terms & conditions	

**Responsibility clause:** all technical information and recommendations are given in good faith and according our best knowledge. Nevertheless, not having any control over the end use of its materials, PolyPiù S.r.l. declines any responsibility for their application. The recommendations given do not relieve the Buyer to perform its own controls to determine the suitability of the materials to its own needs and to the regulations in force. Polypiù S.r.l. reserves the right to amend products and specifications without prior notice.