


PRODUCT: _____ EASYPIU' 250/16 _____ **16 mm – 4 walls**

SHEET SECTION

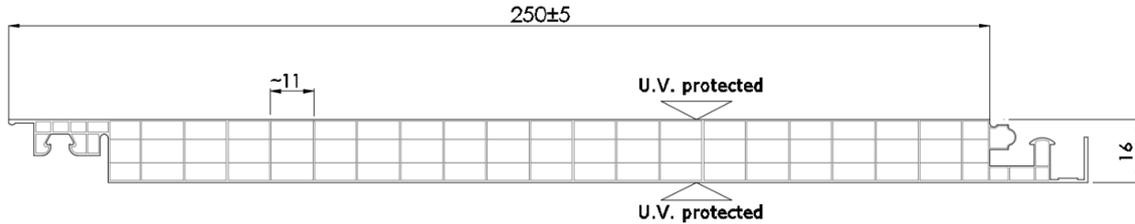


TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	16 ±5%
Sheet width	mm	250 ±5
Sheet length	m	To measure (max recommended length: 7.00 m)
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal
Structure	-	4-wall straight cell
Closure at the ends	-	Sealing with aluminium tape
U.V. protection	-	UV-protected ON BOTH SIDES
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U= 2.10
Light transmission	%	Clear 80 ±2 Opal 50 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

**EASYPIU' 250/16 LOAD-BEARING CAPACITIES
FLAT APPLICATION ON MULTIPLE SUPPORTS**

LOAD TABLES:

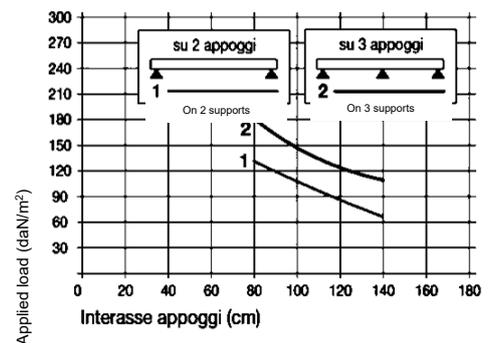

Special treatments



U.V. protection



Bi-colouring



Matt treatment

Purlin centres (cm)



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

