


PRODUCT: _____ GPPIU' 30 _____ 30 mm – 7 walls

SHEET SECTION

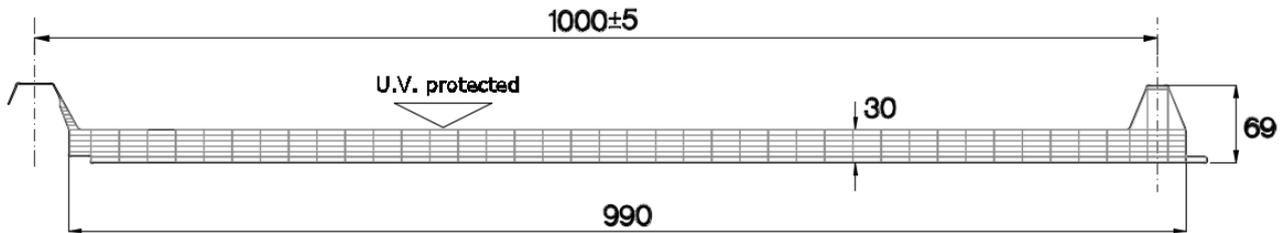


TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	30 ±5%
Sheet width	mm	1000 ±5
Sheet length	m	To measure (max recommended length: 7.00 m)
Compliant with the reference standard	-	UNI EN 16153:A1:2015
Colour	-	Satined clear – Opal
Structure	-	Straight cell with 7 parallel walls
Closure at the ends	-	Sealing with aluminium tape
U.V. protection	-	UV-protected on the outside
Fire Classification	-	B s2 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U=√1.20↗1.30 or 1.25±5
Light transmission	%	Clear 54~ Opal 24~
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

LOAD TABLES:

FLAT APPLICATION ON MULTIPLE SUPPORTS

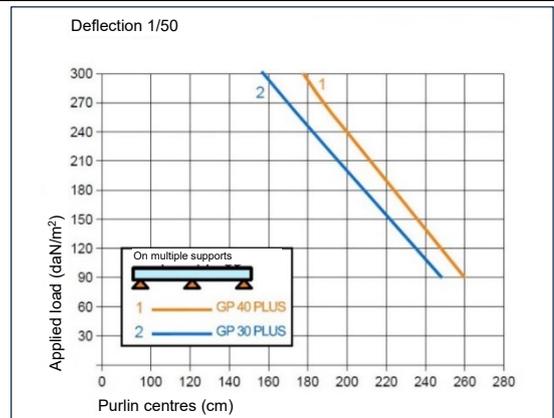

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

