


PRODUCT:

GRECAPIU'

Rib 28/112 9G-6 mm

SHEET SECTION

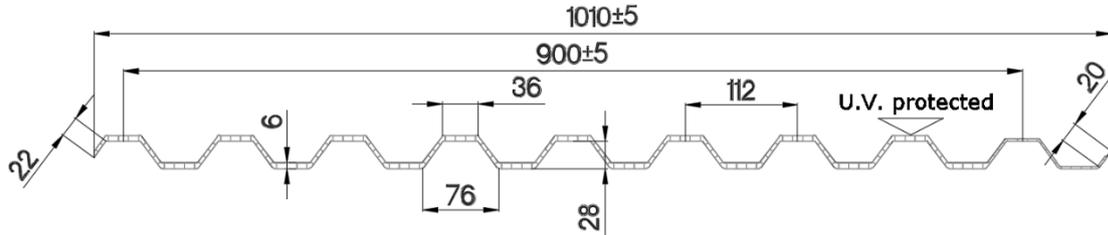

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	6 ±5%
Useful sheet pitch	mm	900 ±5
Sheet width	mm	1010 ±5
Rib pitch	mm	112
Rib height	mm	28
Sheet length	m	To measure (max recommended length: 7.00 m)
Bending	(R) m	Standard hot bending R 3.5 or 6 Variable radii are available on request Contact the Technical Department
Compliant with the reference standard	-	UNI EN 16153:A1:2015
Colour	-	Satined clear – Opal
Structure	-	Single-chamber
Closure at the ends	-	Cell heat-sealing
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U= 3.50
Light transmission	%	Clear 83 ±2 Opal 67 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

Special treatments



U.V. protection



Bi-colouring




Matt treatment



IR treatment


For information on resistance to chemical agents, frame the QR Code:

POLYPIU




LOAD TABLES (Flat and Curved Application R 3.5 m):

**GRECA LOADS 28/112 thickness 6 mm
flat application**

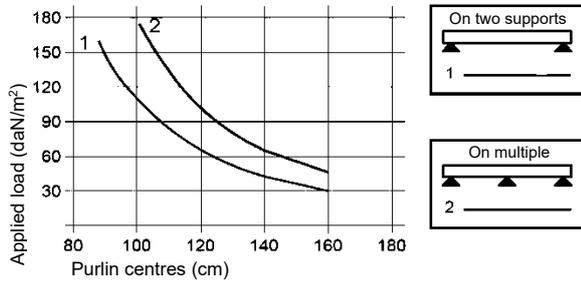

**GRECA LOADS 28/112 thickness 6 mm
curved application R3500 mm**

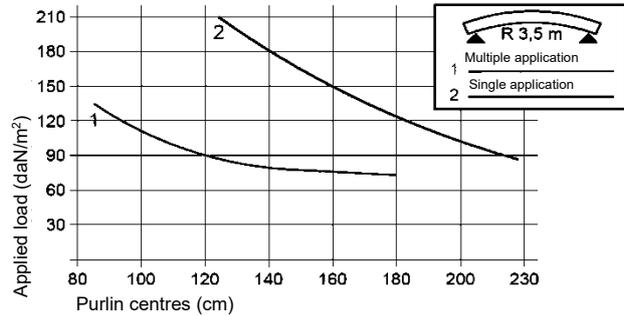

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

