

POLYPIU' SRL

Via A. da Giussano, 15
20011 Corbetta (MI), Italy

Telephone +39 02

9748371


polypiuinfo@polypiu.it

PRODUCT:

LIGHTPIU'

Fibrall

SHEET SECTION

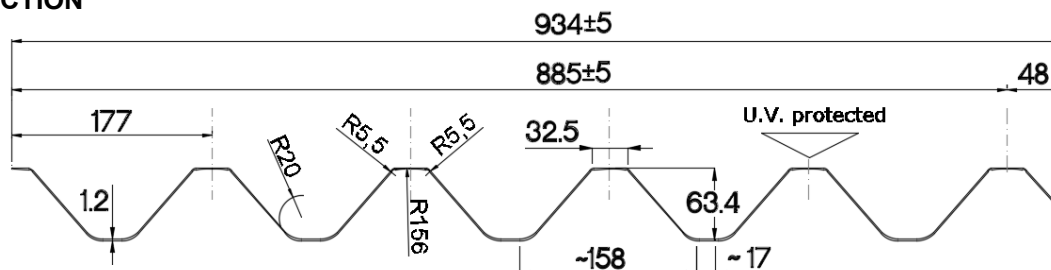

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIO NS
Thickness	mm	1.2±5% (various thicknesses available on request)
Useful sheet pitch	mm	885 ±5
Sheet width	mm	934 ±5
Rib pitch	mm	177
Rib height	mm	63
Sheet length	m	To measure (max recommended length: 7.00 m)
Compliant with the reference standard	-	UNI EN 1013:2015
Colour	-	Clear
Structure	-	Monolithic sheet
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U= 5.70
Light transmission	%	Clear 92 ±2 Opal 80 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

LOAD TABLES:

Special treatments



U.V. protection



Bi-colouring




For information on resistance to chemical agents, frame the QR Code



FLAT APPLICATION ON MULTIPLE SUPPORTS

Permissible deflection: 1/20 of the span

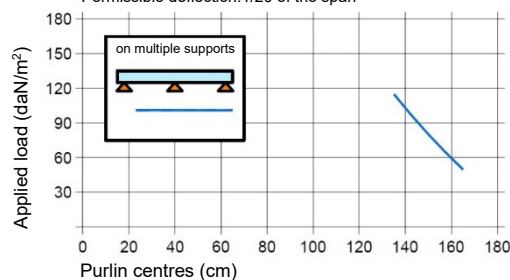

POLYPIU



LIABILITY CLAUSE: all information and technical guidance provided is given in good faith and according to the best of our knowledge. However, as we have no control over how our materials are used, we accept no responsibility for their application. The instructions do not exempt the purchaser from carrying out their own checks to ensure that the materials comply with their own needs and the current regulations. Polypiu S.r.l. reserves the right to modify its products and the content of its documentation at any time without prior notice.