


PRODUCT:

LIGHTPIU'

Onda 76/18 Embossed

SHEET SECTION

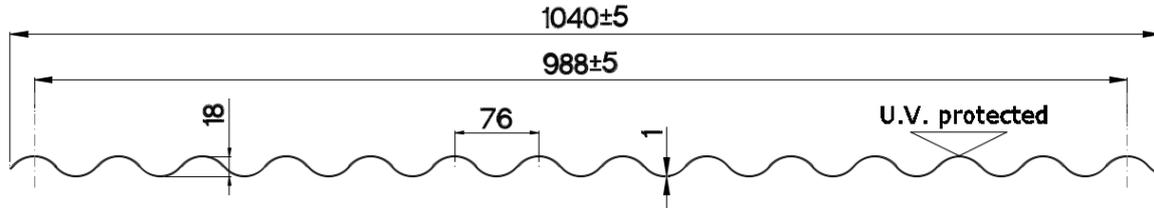

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIO NS
Thickness	mm	1±5% (various thicknesses available on request)
Useful sheet pitch	mm	1216 ±5
Sheet width	mm	1265 ±5 (various widths available on request)
Wave pitch	mm	76
Wave height	mm	18
Sheet length	m	To measure (max recommended length: 7.00 m)
Compliant with the reference standard	-	UNI EN 1013:2015
Colour	-	Clear
Structure	-	Monolithic sheet
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U= 5.70
Light transmission	%	Clear 92 ±2 Opal 80 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU



POLYPIU' SRL

Via A. da Giussano, 15
20011 Corbetta (MI), Italy

Telephone +39 02

9748371

polypiuinfo@polypiu.it

EMBOSED finish



Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

