


PRODUCT:

LIGHTPIU'

SILEX 5G

## SHEET SECTION

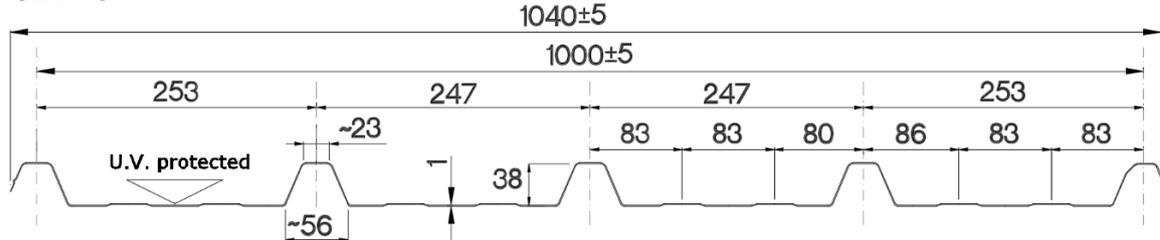

## TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIO NS
Thickness	mm	1±5% (various thicknesses available on request)
Useful sheet pitch	mm	1000 ±5
Sheet width	mm	1040 ±5
Rib pitch	mm	247 - 253
Rib height	mm	38
Sheet length	m	To measure (max recommended length: 7.00 m)
Compliant with the reference standard	-	UNI EN 1013:2015
Colour	-	Clear
Structure	-	Monolithic sheet
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 <sup>-5</sup>
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	U= 5.70
Light transmission	%	Clear 92 ±2      Opal 80 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

## LOAD TABLES:

### Special treatments




U.V. protection




Bi-colouring

For information on resistance to chemical agents, frame the Q

**POLYPIU**



CSI  
Certificazione e Testing

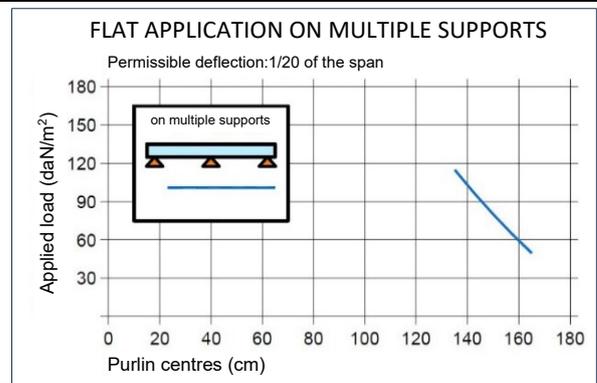

---

**POLYPIU' SRL**

Via A. da Giussano, 15  
20011 Corbetta (MI), Italy

Telephone +39 02  
9748371  
polypiuinfo@polypiu.it

**Special treatments**



**U.V. protection**



**Bi-colouring**



**Matt treatment**



**IR treatment**

---

**For information on resistance to chemical agents, frame the QR Code:**

**POLYPIU**

