


PRODUCT: \_\_\_\_\_  
mm \_\_\_\_\_

ONDAPIU'

177/51 Onda 177/51, THK. 4

## SHEET SECTION

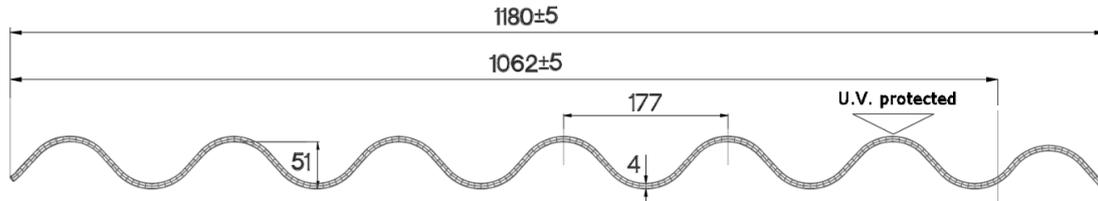

## TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIO NS
Thickness	mm	4 ±5%
Useful sheet pitch	mm	1180 ±5
Sheet width	mm	1062±5
Wave pitch	mm	177
Wave height	mm	51
Sheet length	m	To measure (max recommended length: 7.00 m)
Bending	(R) m	Standard hot bending R 3.5 or 6 <i>Variable radii are available on request</i> <i>Contact the Technical Department</i>
Compliant with the reference standard	-	UNI EN 16153:A1:2015
Colour	-	Satined clear – Opal
Structure	-	3 walls (bi-chamber)
Closure at the ends	-	Cell heat-sealing
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 <sup>-5</sup>
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	U= 3.70
Light transmission	%	Clear 76 ±2      Opal 64 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

### Special treatments



U.V. protection



Bi-colouring




Matt treatment



IR treatment


### For information on resistance to chemical agents, frame the QR Code:

# POLYPIU




LOAD TABLES:

**CURVED APPLICATION R3500**

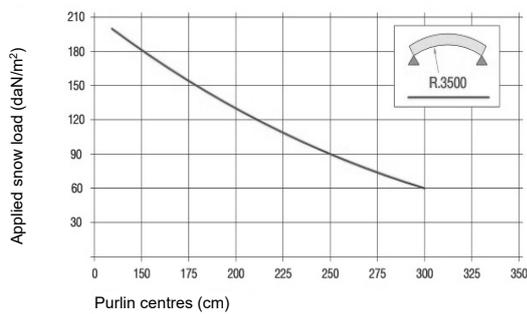

**FLAT APPLICATION ON TWO OR MORE SUPPORTS**

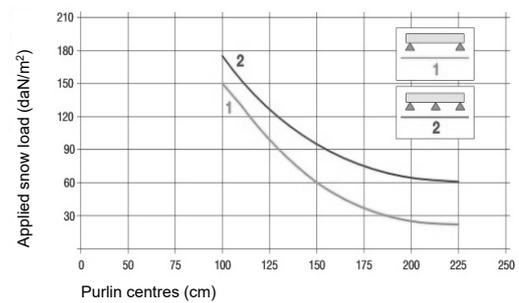

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

**POLYPIU**

