


PRODUCT:

IPERVELARIO 1000/40 MF

IPERVELARIO 40 mm MF

### SHEET SECTION

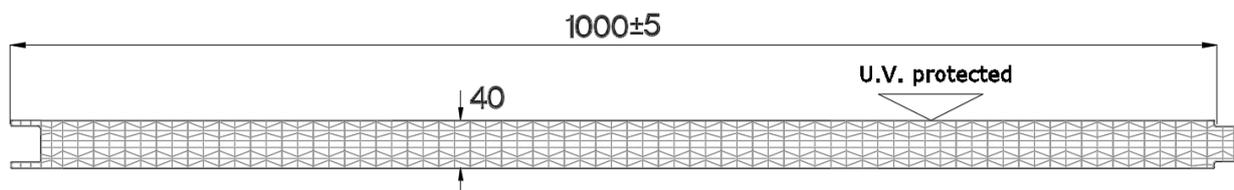

### TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	40 ±5%
Structure	-	10 Double X walls
Sheet width	mm	1000 ±5
Sheet length	m	To measure (max recommended length: 7.00 m)
Closure at the ends	-	Sealing with aluminium tape
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal
U.V. protection	-	UV-PROTECTED
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 <sup>-5</sup>
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	1.13
Light Transmission	- CLEAR - OPAL	49±2 26±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

### Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

# POLYPIU

