


PRODUCT:

PANELPIU' 500/16

16 mm Honeycomb


SHEET SECTION

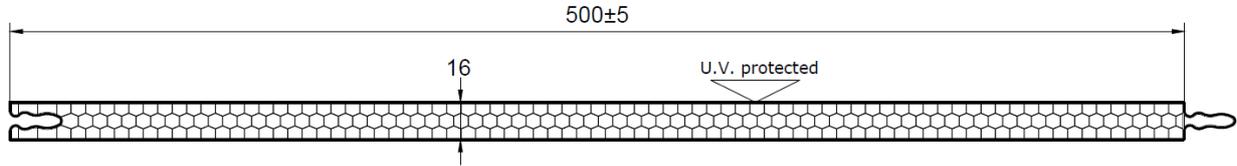

TECHNICAL SPECIFICATIONS:

| DATA | UNIT | SPECIFICATIONS |
|---|--------------------|---|
| Thickness | mm | 16 ±5% |
| Structure | - | Honeycomb |
| Sheet width | mm | 500 ±5 |
| Sheet length | m | Made to measure |
| Closure at the ends | - | Sealing with aluminium tape |
| Compliant with the reference standard | - | UNI EN 16153:2015 |
| Colour | - | Satined clear – Opal (other colours are available on request) |
| U.V. protection | - | UV-protected on the external side |
| Fire Classification | - | B s1 d0 |
| Operating temperature | °C | -40° / + 130° |
| Linear Thermal Expansion | mm/mm °C | 6.7 x10 ⁻⁵ |
| Resistance to chemical agents and use and maintenance | - | Refer to the catalogue for the specifications |
| Thermal Transmittance | W/m ² K | 1.99 |
| Light Transmission | - CLEAR | 66±2 |
| | - OPAL | 44±2 |
| Solar factor | - CLEAR | 76±2 |
| | - OPAL | 56±2 |
| Warranty | - | 10 years - Refer to our Warranty for the terms and conditions |

LOAD TABLES:

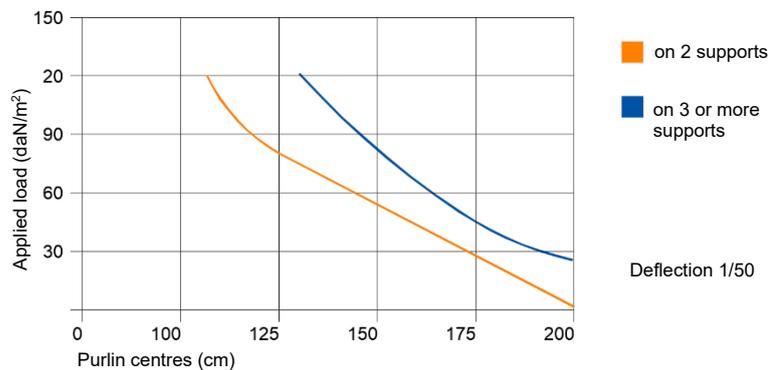

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

