


PRODUCT:  
**SHEET SECTION**


PANELPIU' 500/25 **25 mm Honeycomb**

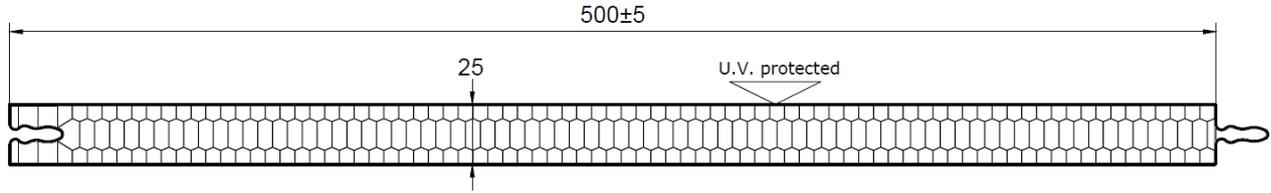

**TECHNICAL SPECIFICATIONS:**

DATA	UNIT	SPECIFICATIONS
Thickness	mm	25 ±5%
Structure	-	Honeycomb
Sheet width	mm	500 ±5
Sheet length	m	Made to measure
Closure at the ends	-	Sealing with aluminium tape
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal (other colours are available on request)
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 <sup>-5</sup>
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	1.67
Light Transmission	- CLEAR - OPAL	61±2 37±2
Solar factor	- CLEAR - OPAL	71±2 48±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

**LOAD TABLES:**

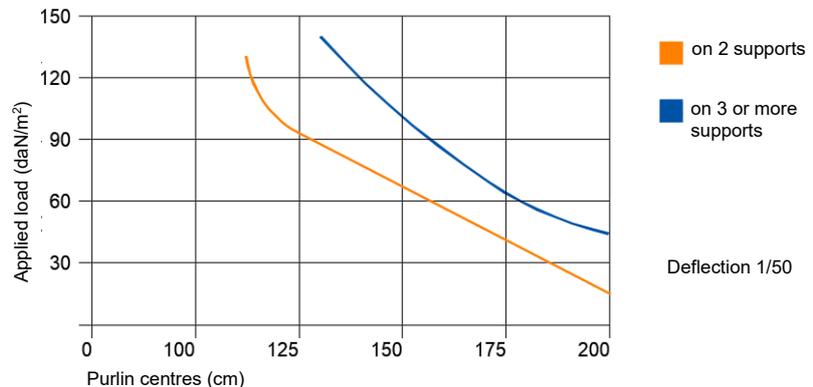

**Special treatments**



U.V. protection



Bi-colouring



Matt treatment



IR treatment

**For information on resistance to chemical agents, frame the QR Code:**

