


PRODUCT: \_\_\_\_\_

PANELPIU' 500/40 \_\_\_\_\_

**40 mm - 10 Walls**


## SHEET SECTION

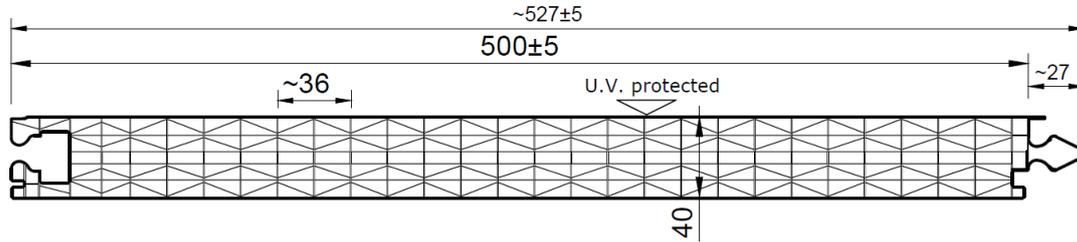

## TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	40 ±5%
Structure	-	10 Double X walls
Sheet width	mm	500 ±5
Sheet length	m	Made to measure
Closure at the ends	-	Sealing with aluminium tape
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal (other colours are available on request)
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	6.7 x10 <sup>-5</sup>
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	1.00
Light Transmission	- CLEAR - OPAL	% 49±2 26±2
Solar factor	- CLEAR - OPAL	% 53±2 42±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

## LOAD TABLES:

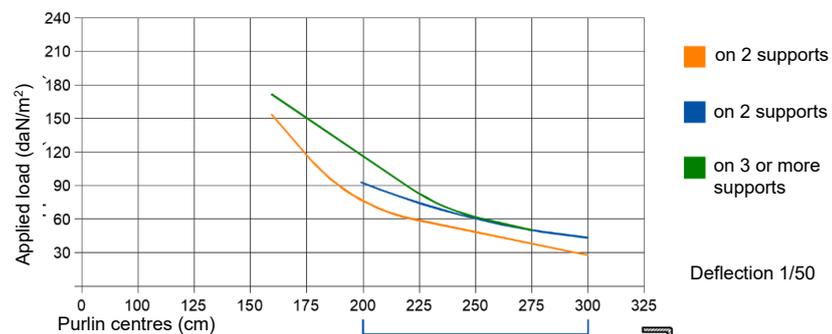

## Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

# POLYPIU'

