


PRODUCT: _____
SHEET SECTION

PANELPIU' 500/40


40 mm - 14 Walls

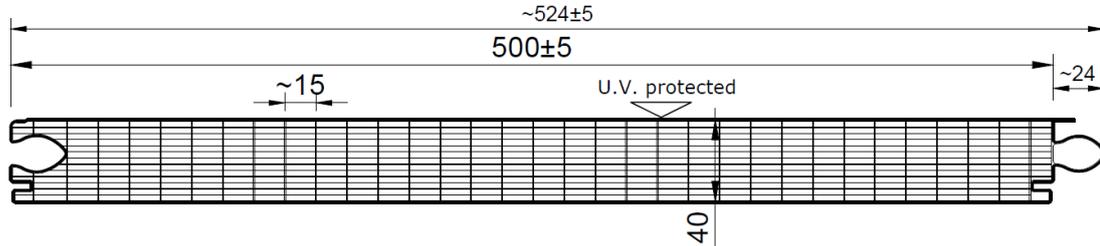

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS	
Thickness	mm	40 ±5%	
Structure	-	14 Walls	
Sheet width	mm	500 ±5	
Sheet length	m	Made to measure	
Closure at the ends	-	Sealing with aluminium tape	
Compliant with the reference standard	-	UNI EN 16153:2015	
Colour	-	Satined clear – Opal (other colours are available on request)	
U.V. protection	-	UV-protected on the external side	
Fire Classification	-	B s1 d0	
Operating temperature	°C	-40° / + 130°	
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵	
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications	
Thermal Transmittance	W/m ² K	0.92	
Light Transmission	- CLEAR	%	42±2
	- OPAL	%	27±2
Solar factor	- CLEAR	%	47±2
	- OPAL	%	36±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions	

LOAD TABLES:

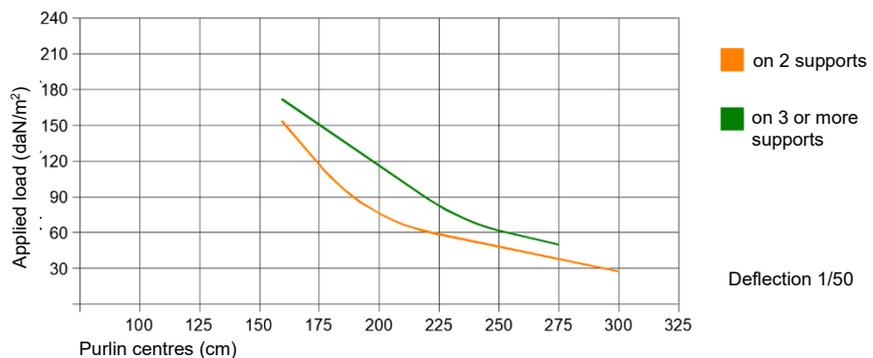

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

