


PRODUCT:

REVERSPIU'

Reverspiù 600/10

PRODUCT SECTION

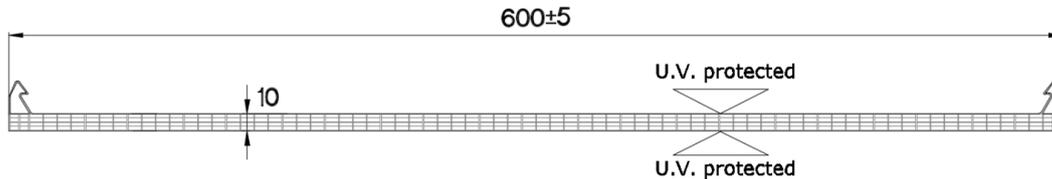

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	10 ±5%
Sheet width and Useful pitch	mm	600 ±5
Sheet length	m	Made to measure
Total height of sheet and upright	mm	39-44-61
Bending	m	Radius to be verified with our Technical Department
Structure	-	5-wall straight cell
Closure at the ends	-	Cell heat-sealing or Sealing with aluminium tape
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal (other colours are available on request)
U.V. protection	-	UV-protected on both sides
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	0.065 (6.7 x10 ⁻⁵)
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	2.40
Light Transmission	CLEAR	67±2
	OPAL	50±2
Solar factor	CLEAR	67±2
	OPAL	42±2
Shading coefficient	CLEAR	0.77±0.02
	OPAL	0.49±0.02

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:


POLYPIU



Warranty


10 years - Refer to our Warranty for the terms and conditions

INSTALLATION DETAILS:

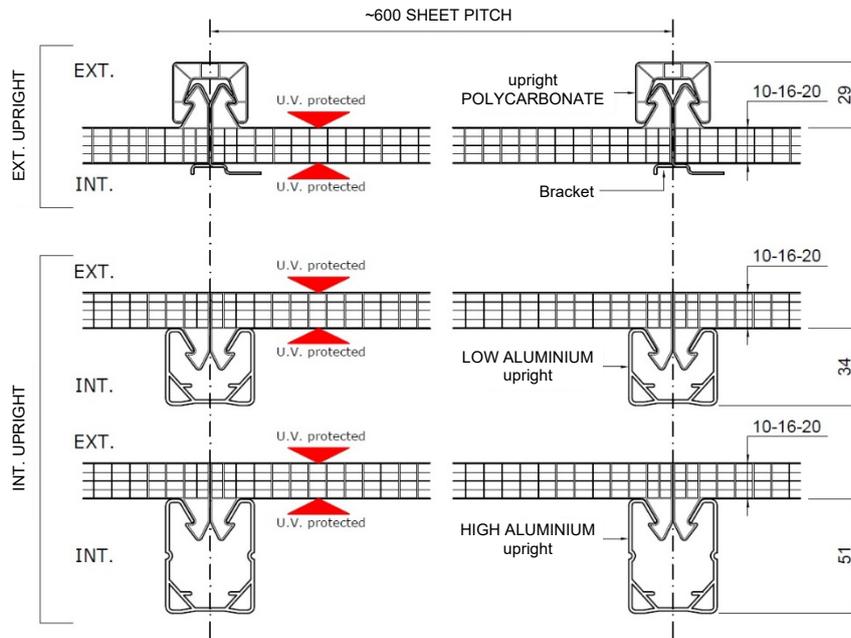

LOAD TABLES:

NOTE:
The load tables refer to polycarbonate uprights mounted on the outside and aluminium uprights mounted on the inside

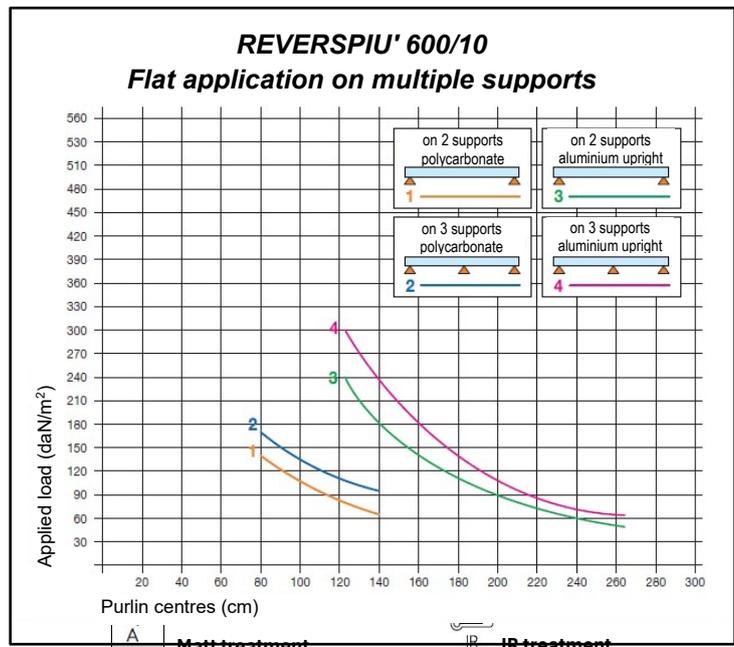

Special treatments



U.V. protection



Bi-colouring



For information on resistance to chemical agents, frame the QR Code:

POLYPIU



POLYPIU' SRL

Via A. da Giussano, 15
20011 Corbetta (MI), Italy

Telephone +39 02
9748371
polypiuinfo@polypiu.it

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

