


PRODUCT:

REVERSPIU'

Reverspiù 600/16

## PRODUCT SECTION

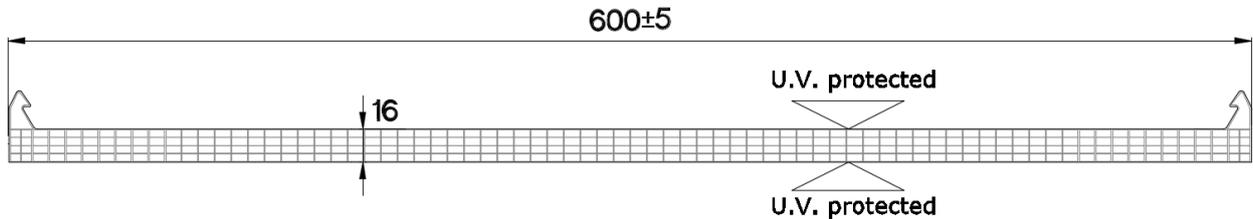

## TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	16 ±5%
Sheet width and Useful pitch	mm	600 ±5
Sheet length	m	Made to measure
Total height of sheet and upright	mm	45-50-67
Bending	m	Radius to be verified with our Technical Department
Structure	-	5-wall straight cell
Closure at the ends	-	Cell heat-sealing or Sealing with aluminium tape
Compliant with the reference standard	-	UNI EN 16153:2015
Colour	-	Satined clear – Opal (other colours are available on request)
U.V. protection	-	UV-protected on both sides
Fire Classification	-	B s1 d0
Operating temperature	°C	-40° / + 130°
Linear Thermal Expansion	mm/mm °C	0.065 (6.7 x10 <sup>-5</sup> )
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m <sup>2</sup> K	2.10
Light Transmission	CLEAR	66±2
	OPAL	43±2
Solar factor	CLEAR	58±2
	OPAL	43±2
Shading coefficient	CLEAR	0.67±0.02

### Special treatments



U.V. protection



Bi-colouring




Matt treatment



IR treatment


### For information on resistance to chemical agents, frame the QR Code:

# POLYPIU




	OPAL	0.50±0.02
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

INSTALLATION DETAILS:

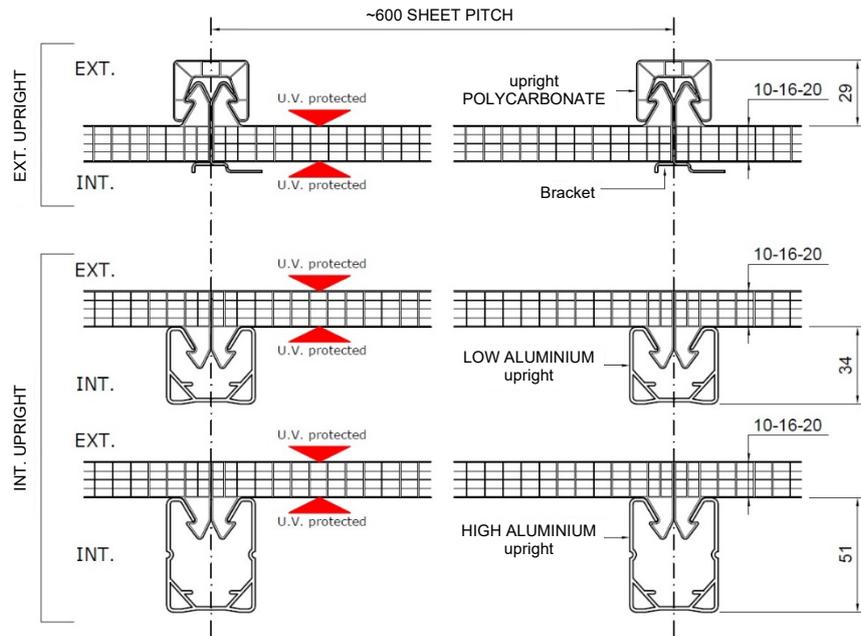

LOAD TABLES:

**NOTE:**  
The load tables refer to polycarbonate uprights mounted on the outside and aluminium uprights mounted on the inside

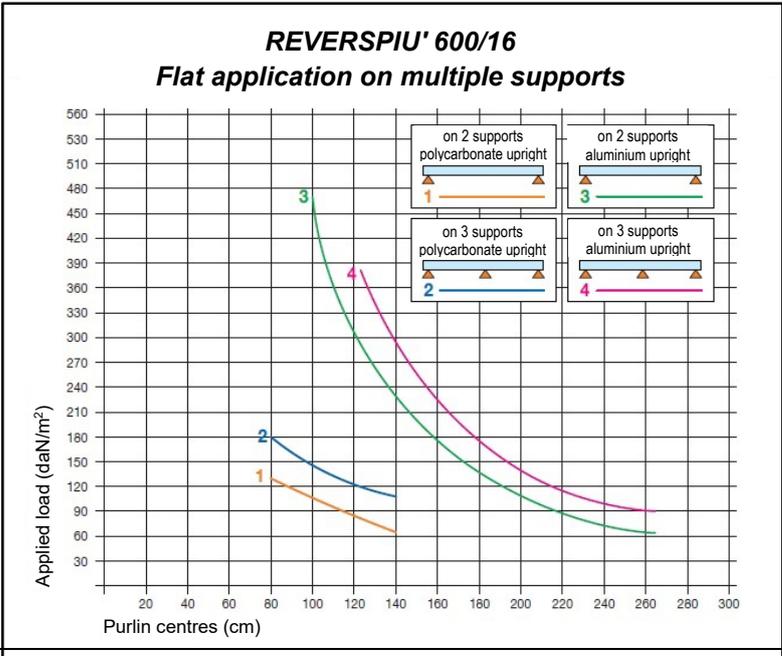

Special treatments



U.V. protection



Bi-colouring

For information on resistance to chemical agents, frame the QR Code:

