


PRODUCT:

SMARTPIU'

Onda 146/48

SHEET SECTION

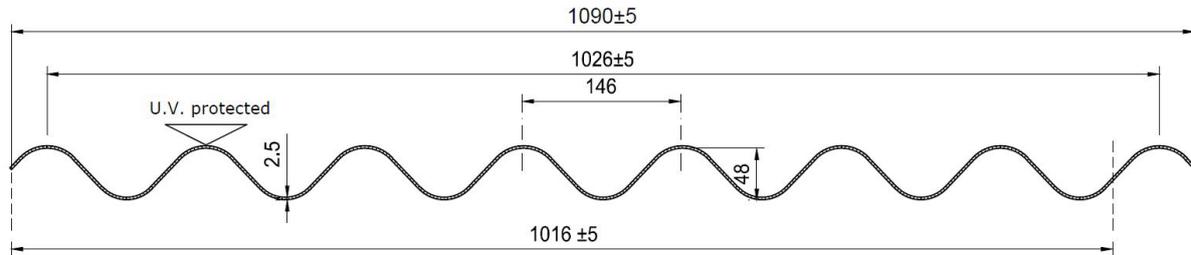

TECHNICAL SPECIFICATIONS:

| DATA | UNIT | SPECIFICATIONS |
|---|--------------------|--|
| Thickness | mm | 2.5 ±5% |
| Useful sheet pitch | mm | 1016 ±5 |
| Sheet width | mm | 1090 ±5 |
| Wave pitch | mm | 146 |
| Wave height | mm | 48 |
| Sheet length | m | To measure (max recommended length: 7.00 m) |
| Bending | (R) m | Standard hot bending R 3.5 or 6 <i>Variable radii are available on request</i> <i>Contact the Technical Department</i> |
| Compliant with the reference standard | - | UNI EN 16153:A1:2015 |
| Colour | - | Satined clear – Opal |
| Structure | - | Single-chamber |
| Closure at the ends | - | Cell heat-sealing |
| U.V. protection | - | UV-protected on the external side |
| Fire Classification | - | B s1 d0 |
| Operating temperature | °C | -40° / + 130° |
| Linear Thermal Expansion | mm/mm °C | 6.7 x10 ⁻⁵ |
| Resistance to chemical agents and use and maintenance | - | Refer to the catalogue for the specifications |
| Thermal Transmittance | W/m ² K | U= 4.71 |
| Light transmission | % | Clear 83 ±2 Opal 72 ±2 |
| Warranty | - | 10 years - Refer to our Warranty for the terms and conditions |

Special treatments



U.V. protection



Bi-colouring




Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU



POLYPIU' SRL


Via A. da Giussano, 15
20011 Corbetta (MI), Italy

Telephone +39 02

9748371

polypiuinfo@polypiu.it

LOAD TABLES:

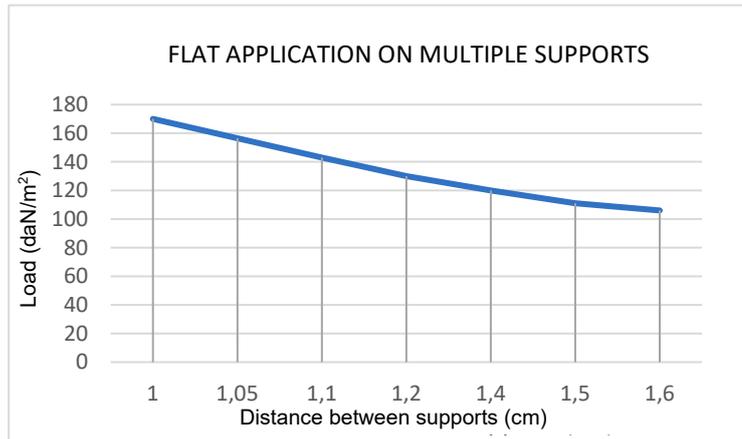

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU

