


PRODUCT:

SEPLUX 40

40 mm with 5 X Walls

## SHEET SECTION

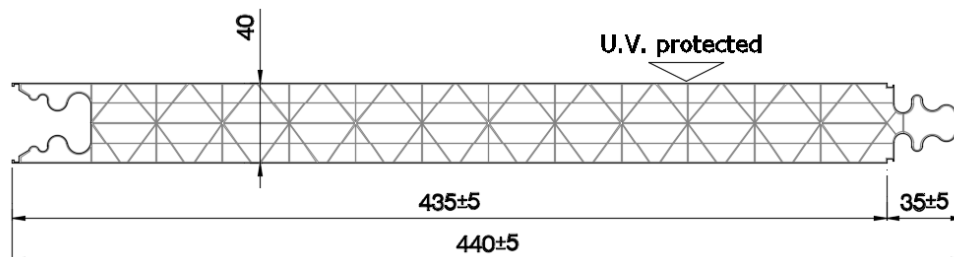

## TECHNICAL SPECIFICATIONS:

| DATA                                                  | UNIT               | SPECIFICATIONS                                                |
|-------------------------------------------------------|--------------------|---------------------------------------------------------------|
| Thickness                                             | mm                 | 40±5%                                                         |
| Structure                                             | -                  | 5 Multi-chamber walls                                         |
| Sheet width                                           | mm                 | 435 ±5                                                        |
| Sheet length                                          | m                  | To measure                                                    |
| Closure at the ends                                   | -                  | Sealing with aluminium tape                                   |
| Compliant with the reference standard                 | -                  | UNI EN 16153:2015                                             |
| Colour                                                | -                  | Satined clear – Opal (other colours are available on request) |
| U.V. protection                                       | -                  | UV-protected on the external side                             |
| Fire Classification                                   | -                  | B s1 d0                                                       |
| Operating temperature                                 | °C                 | -40 / + 130                                                   |
| Linear Thermal Expansion                              | mm/mm °C           | 6.7 x10 <sup>-5</sup>                                         |
| Resistance to chemical agents and use and maintenance | -                  | Refer to the catalogue for the specifications                 |
| Thermal Transmittance                                 | W/m <sup>2</sup> K | 1.20                                                          |
| Light Transmission -CLEAR                             | %                  | 54.4±2                                                        |
| Warranty                                              | -                  | 10 years - Refer to our Warranty for the terms and conditions |

### Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

**POLYPIU**



LIABILITY CLAUSE: all information and technical guidance provided is given in good faith and according to the best of our knowledge. However, as we have no control over how our materials are used, we accept no responsibility for their application. The instructions do not exempt the purchaser from carrying out their own checks to ensure that the materials comply with their own needs and the current regulations. Polypiu S.r.l. reserves the right to modify its products and the content of its documentation at any time without prior notice.