


PRODUCT:

SEPLUX GRECA 7G

10 mm with 4 Walls

SHEET SECTION

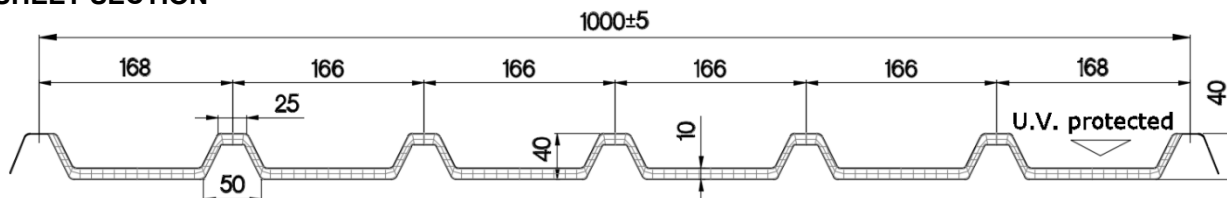

TECHNICAL SPECIFICATIONS:

DATA	UNIT	SPECIFICATIONS
Thickness	mm	10 ±5%
Structure	-	Cell with 4 walls
Sheet pitch	mm	1000 ±5
Rib pitch	mm	166
Rib height	mm	40 central 40 side
Sheet length	m	To measure (max recommended length: 7.00 m)
Bending	(R) m	Standard hot bending R 3.5 or 6 Variable radii are available on request Contact the Technical Department
Compliant with the reference standard	-	UNI EN 16153:A1:2015
Colour	-	Satined clear and Opal
Closure at the ends	-	Cell heat-sealing
U.V. protection	-	UV-protected on the external side
Fire Classification	-	B s1 d0
Operating temperature	°C	-40 / + 130
Linear Thermal Expansion	mm/mm °C	6.7 x10 ⁻⁵
Resistance to chemical agents and use and maintenance	-	Refer to the catalogue for the specifications
Thermal Transmittance	W/m ² K	U= 2.70
Light transmission	%	Clear 73 ±2
Warranty	-	10 years - Refer to our Warranty for the terms and conditions

SIDE RIBS:

STANDARD WIDTHS



Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:


POLYPIU'





LIABILITY CLAUSE: all information and technical guidance provided is given in good faith and according to the best of our knowledge. However, as we have no control over how our materials are used, we accept no responsibility for their application. The instructions do not exempt the purchaser from carrying out their own checks to ensure that the materials comply with their own needs and the current regulations. Polypiu S.r.l. reserves the right to modify its products and the content of its documentation at any time without prior notice.

LOAD TABLES:

FLAT APPLICATION

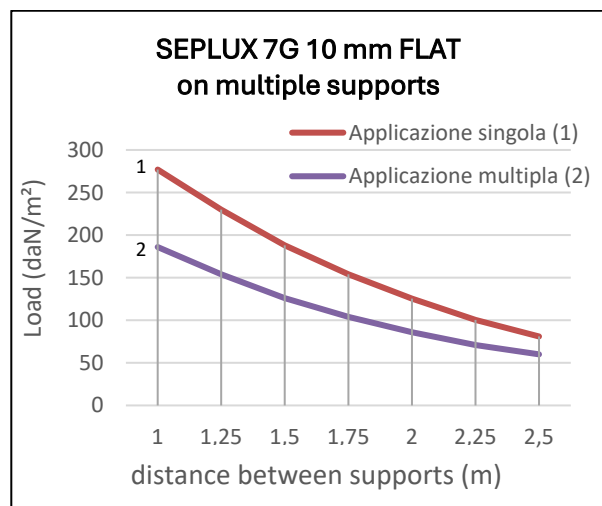

CURVED APPLICATION

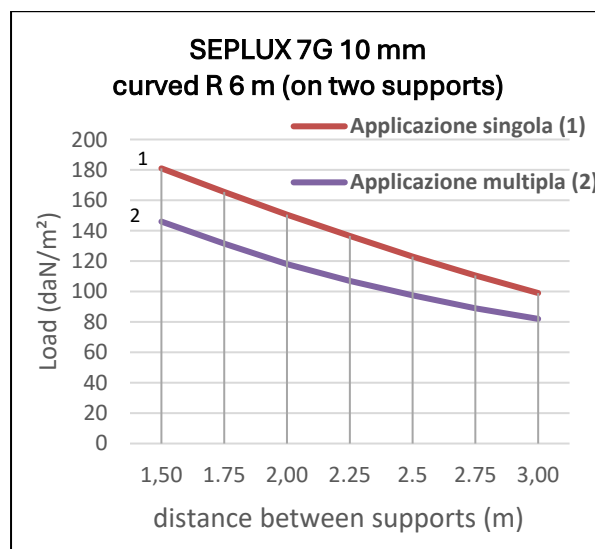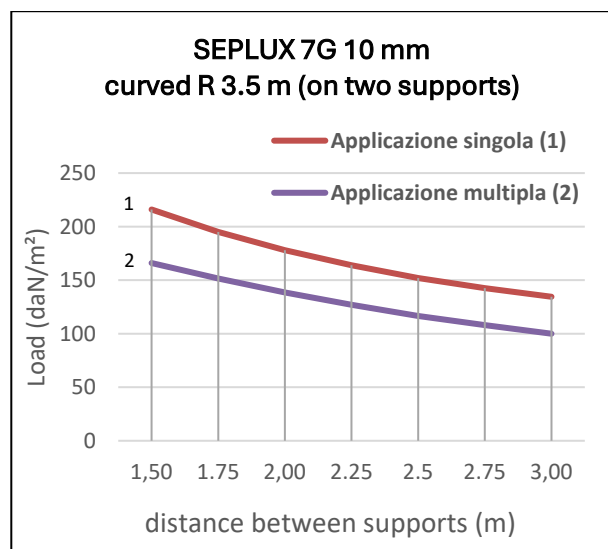

For CURVED GRECAPIU' with a radius of 3.5 and 6 m in multiple applications (2), with a span of more than 2 m and purlin centres ranging from 2.0 to 3.0 m, combination with sheet with a calendered square profile upright

Special treatments



U.V. protection



Bi-colouring



Matt treatment



IR treatment

For information on resistance to chemical agents, frame the QR Code:

POLYPIU'



LIABILITY CLAUSE: all information and technical guidance provided is given in good faith and according to the best of our knowledge. However, as we have no control over how our materials are used, we accept no responsibility for their application. The instructions do not exempt the purchaser from carrying out their own checks to ensure that the materials comply with their own needs and the current regulations. Polypiu S.r.l. reserves the right to modify its products and the content of its documentation at any time without prior notice.